


The Vario System directly from the specialist

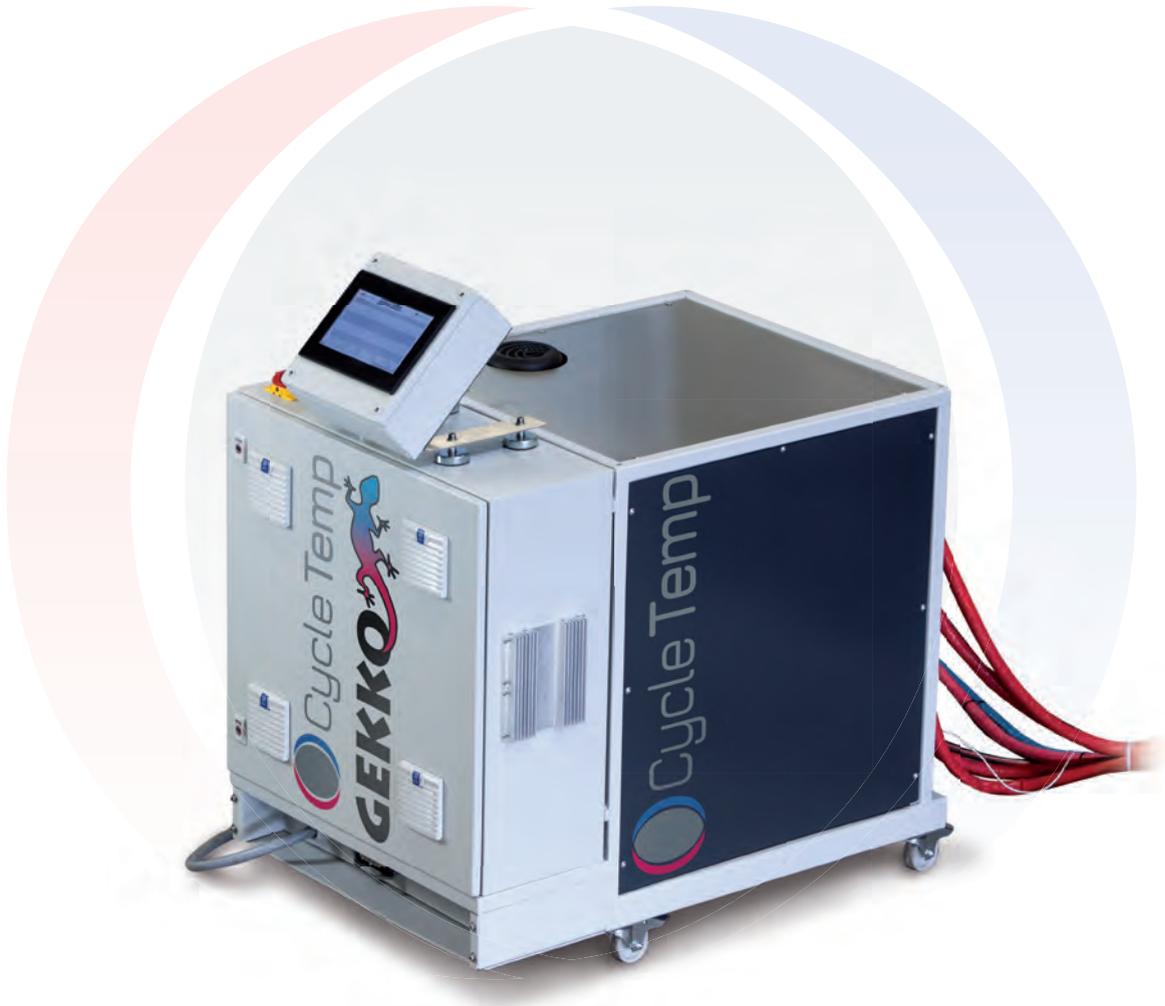

**CycleTemp presents the GEKKO COMPACT -
the world's first fully integrated Vario system.**


Today's injection molding processes require the highest level of accuracy, the best quality and the fastest cycle times. In more and more cases, these requirements can only be achieved with variothermal technology. That is why we offer you a Vario device that is optimally adapted to it. It does not require any additional valve stations and it is including the integrated separate return line!

This means that the process water from the tool is always returning into the right cycle. This can save up to 40% of the energy, especially with multiple tools. And it shortens the cycle times for heating and cooling as well.

The removable touchscreen helps you with set-up or process optimization. It can simply be placed anywhere just with connecting a longer LAN cable. The magnetic feet make it easy to set up on the control panel of the injection molding machine.

The GEKKO COMPACT offers from start to finish:

- Simplest set-up processes: 4 hoses are going to the tool, where they are connected to form a flow and a return. Its only cooling water, electricity, compressed air and the connection to the injection molding machine which has to be done. The GEKKO automatically adapts to the conditions
- Simplest process management: In the temperature-controlled process, the operator enters the necessary parameters for the injection and demolding temperatures via the touchscreen on the machine. The process adapts. The operator always sees every detail of the process.
- Extremely fast heating and cooling times due to large water reservoirs and temperature differences.
- Lowest possible energy consumption: The GEKKO heats or cools the mold. But not both at the same time. And the heat transfer medium water is returned back to the correct circuit line. Together with the frequency control of the circulation pump, up to 40 % energy is saved and resources are conserved.
- Simple, fully automatic shutdown and cooling of all hot components and contents.
- Reliability and durability of the high-quality components by reducing them to what is necessary for Variothermie.
- Remote maintenance by simply connecting to a network: The GEKKO independently builds a VPN tunnel to the factory and enables immediate diagnosis via extensive sensors - worldwide.

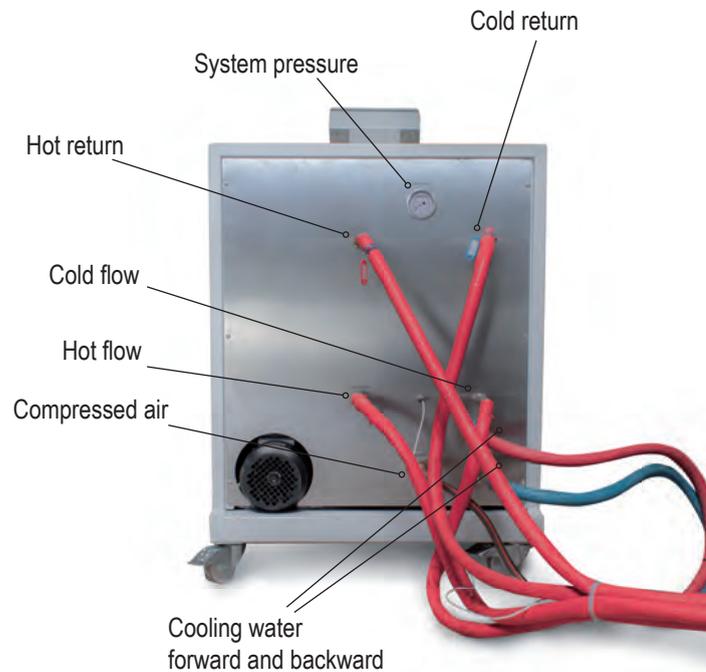

Technical data	
Performance	GEKKO COMPACT
Heat output	36 KW
Cooling capacity	Direct cooling
Max. temperature	up to 180°C / 200°C
Pump capacity	max. 90 l/min. 8 bar max. 60 l/min. 13 bar
Connections	
Voltage	400V/ 1x 63A
Compressed air	5,0 – 8,0 bar
Supply/return	1/2"
Cooling water network	1/2"

GEKKO – why the name?

The gekko is a poikilothermic organism. It is very nimble and also highly efficient in regards to its energy consumption. We consider it the perfect namesake for our temperature control unit.



CycleTemp GmbH

Hämmerstraße 6 · 58708 Menden, Germany
Tel.: +49 2373 3964679
Mobil: +49 151 10317104
info@cycletemp.de
www.cycletemp.de



website